


Oil Pattern Distance	44	Reverse Brush Drop	38	Oil Per Board	Multi ul
Forward Oil Total	13 mL	Reverse Oil Total	13.6 mL	Volume Oil Total	26.6 mL
Tank Configuration	A Only	Tank A Conditioner	FIRE	Tank B Conditioner	FIRE

	START	STOP	LOADS	MICS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	4	50	18	3	A	148	0.0	7.6	7.6	7400
2	10L	10R	1	50	18	3	A	21	7.6	10.1	2.5	1050
3	12L	12R	2	50	18	3	A	34	10.1	15.2	5.1	1700
4	14L	14R	3	50	18	3	A	39	15.2	22.8	7.6	1950
5	16L	16R	2	50	18	3	A	18	22.8	27.9	5.1	900
6	2L	2R	0	50	26	3	A	0	27.9	44.0	16.1	0

	START	STOP	LOADS	MICS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	50	30	3	A	0	44.0	35.0	-9.0	0
2	14L	14R	1	50	22	3	A	13	35.0	31.9	-3.1	650
3	13L	13R	2	50	18	3	A	30	31.9	26.8	-5.1	1500
4	12L	12R	3	50	18	3	A	51	26.8	19.2	-7.6	2550
5	11L	11R	1	50	18	3	A	19	19.2	16.7	-2.5	950
6	9L	9R	1	50	18	3	A	23	16.7	14.2	-2.5	1150
7	8L	8R	1	50	18	3	A	25	14.2	11.7	-2.5	1250
8	2L	2R	3	50	14	3	A	111	11.7	5.8	-5.9	5550
9	2L	2R	0	50	14	3	A	0	5.8	0.0	-5.8	0

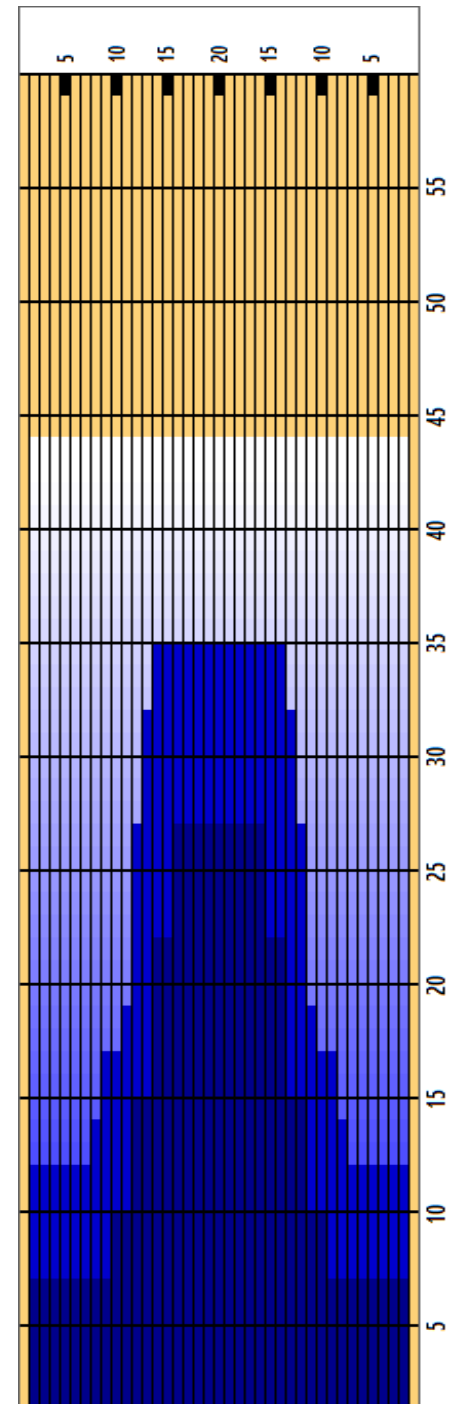

Cleaner Ratio Main Mix 5:1 Forward
 Cleaner Ratio Back End Mix 5:1 Reverse
 Cleaner Ratio Back End Distance 59 Combined
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



--

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	3.43	2.22	1.09	1.09	2.22	3.43

